Technical Data Sheet

24 V 34 Ah LiFePO4 Lithium Battery



Reference | B24034L

Technical Specifications

Product reference: B24034L
Technology: Lithium Iron Phosphate
Nominal voltage: 25.6 V
Minimum capacity: 34 Ah
Energy: 870.4 Wh
Charging voltage: 29.2 V
Standard charging current: 13 A
Fast charging current: 25 A
Continuous discharge current: 54 A
Pulse discharge current: 70 A (3 s)
Self-discharge: < 3% / month
Operating temperature: -20°C to +60°C
Charging temperature: 0°C to +45°C
Cycle life: 2,000 at 1C, 100% DOD

Battery Management System (BMS)

- Short-circuit protection
- Overcharge protection (200 A +/- 20 A)
- Deep-discharge protection
- Battery cut-off below 18 V
- Overtemperature protection
- Battery cut-off above 65°C
- Automatic reconnection after protection cut-off
- Cell balancing


Connection

M8 screw terminals

Weight: 8.1 kg
Dimensions: 257 (L) × 132 (W) × 200 (H) mm

IP51 (protection against vertically falling water drops)


CE RoHS Compliant UN38.3 PASSED Transport Safety Certified

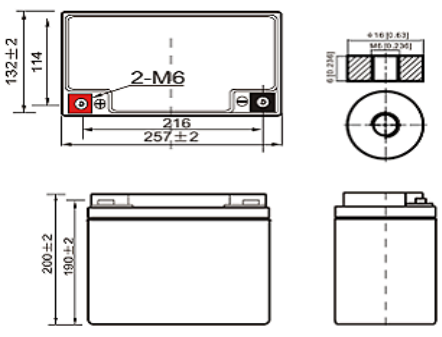

Technical Data Sheet


Different Rate Discharge Curve

Different Rate Discharge Curve @25℃

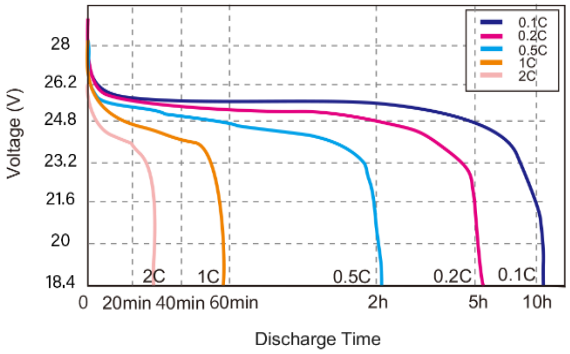


Different Temperature Discharge Curve

Different Temperature Discharge Curve @0.5C

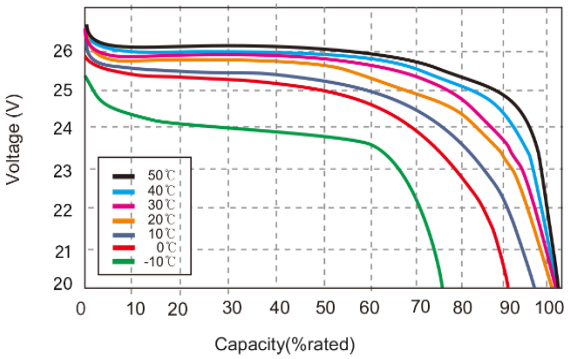


State of Charge Curve

State of Charge Curve @0.5C 25℃

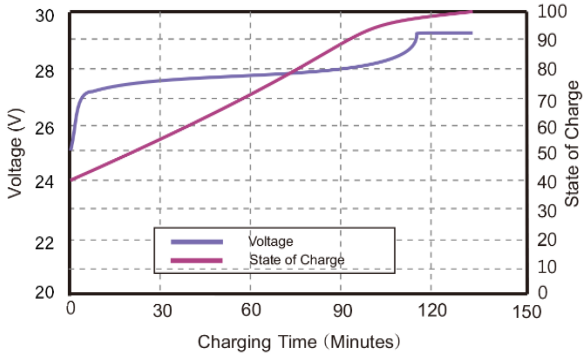


Charging Characteristics

Charging Characteristics @0.5C 25℃

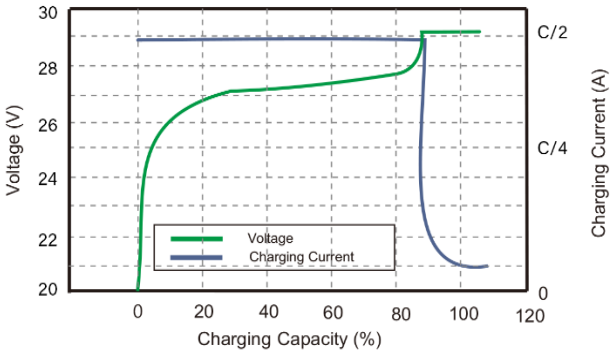

Cycle Life Curve

Different DOD Discharge Cycle Life Curve @1C

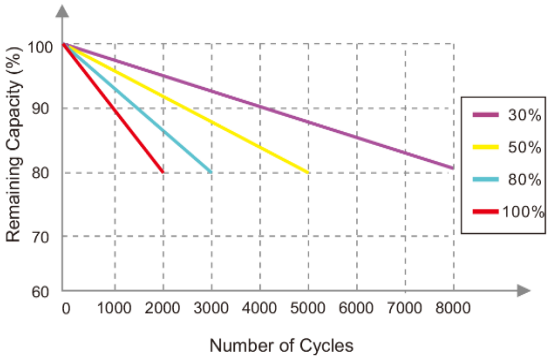

Self Discharge Characteristics Curve

Different Temperature Self Discharge Curve

