SOLiSE

Technical Data Sheet

12 V 4 A LiFePO4 Battery Charger



Reference | CH1204S1

Technical Specifications

Product reference: CH1204S1
Input voltage: 100–240 V AC, 50/60 Hz
Charging voltage: 14.4 V ± 0.2 V DC
Minimum charge voltage: 8 V DC
Output current: 4 A ± 10%
No-load power: < 0.5 W
Efficiency: 85% at nominal current
Storage temperature: −40°C to +75°C
Operating temperature: −29°C to +45°C
Dimensions: 150 × 62 × 35 mm
Weight: 445 g


Connection

Jack connector

Standards

EN61558 – EN60950 – UL60950

Charging Curve

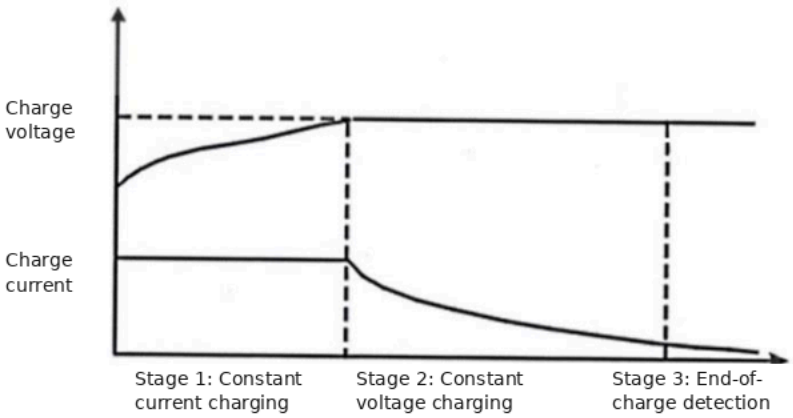

SOLISE – ZI Visionis 395 rue de la Foudonne 01090 GUEREINS
EURL au capital de 400 000€ - N°SIRET 53768007600032 RCS Bourg en Bresse APE 4799 B – N°TVA 80537680076